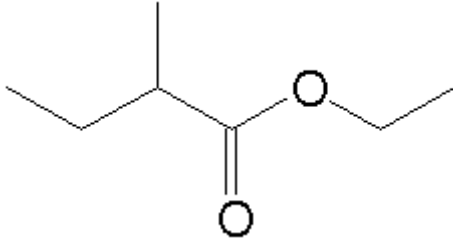


## SPECIFICATION SHEET

**VERSION** 2,00 **VERSION DATE** 07/04/21 **PRINT DATE** 20/10/21

<b>PRODUCT</b>	ETHYL 2-METHYLBUTYRATE CHINA	
<b>APPLICATIONS</b>	Raw material for industrial use intended for the manufacture of flavours and/or fragrances.	
<b>IUPAC NAME</b>	ETHYL 2-METHYLBUTYRATE	
<b>SYNONYMS</b>	CYDRANE	
<b>FORMULA</b>	C7 H14 O2	
<b>MOLECULAR WEIGHT</b>	130,00	
<b>CAS</b>	7452-79-1	
<b>EINECS</b>	231-225-4	
<b>FEMA</b>	2443	
<b>TARIFF NUMBER</b>	2915609000	
<b>KOSHER CERTIFICATE</b>	AVAILABLE ON REQUEST	
<b>FOOD GRADE CERTIFICATE</b>	AVAILABLE ON REQUEST	
<b>REACH REGISTRATION NO.</b>	On request. REACH and non-REACH material available for this product.	

## SPECIFICATIONS

<b>ASPECT AT 20°C</b>	CLEAR MOBILE LIQUID
<b>COLOUR</b>	COLORLESS
<b>ODOUR</b>	POWERFUL, GREEN, FRUITY, MINTY
<b>TASTE</b>	FRUITY, GREEN, PUNGENT, APPLE PEEL
<b>DENSITY A 20°C (g / ml)</b>	0,865 - 0,871
<b>DENSITY 25/25</b>	0,863 - 0,870
<b>REFRACTIVE INDEX nD20</b>	1,3940 - 1,3990
<b>REFRACTIVE INDEX nD25</b>	-
<b>OPTICAL ROTATION (°)</b>	/
<b>BOILING POINT (°C)</b>	132 - 133 (1013 hPa)
<b>MELTING POINT (°C)</b>	-
<b>FLASH POINT (°C)</b>	26,00
<b>ASSAY (% GC)</b>	> 99
<b>ACID VALUE (mg KOH/g)</b>	< 1
<b>SOLUBILITY</b>	PRACTICALLY INSOLUBLE IN WATER
<b>VAPOUR PRESSURE</b>	26,7 hPa (20°C)
<b>OTHER SOLUBILITIES</b>	SOLUBLE IN ETHANOL

**OTHER TECHNICAL DATA** PEROXIDES < 20,0 MMOL/L

## STABILITY AND STORAGE

KEEP IN TIGHTLY CLOSED CONTAINER IN A COOL AND DRY PLACE, PROTECTED FROM LIGHT. WHEN STORED FOR MORE THAN 24 MONTHS, QUALITY SHOULD BE CHECKED BEFORE USE.  
AWAY FROM SOURCES OF IGNITION.

WE BELIEVE THE ABOVE INFORMATION TO BE CORRECT BUT WE DO NOT PRESENT IT AS ALL INCLUSIVE AND AS SUCH SHOULD BE USED AS A GUIDE. IT IS THE SOLE RESPONSIBILITY OF THE RECEIVER OF OUR PRODUCT TO COMPLY WITH EXISTING REGULATIONS AND INSTRUCTIONS.

THIS PRODUCT HAS NOT BEEN FILTERED DUE TO TECHNOLOGICAL REASONS. WE RECOMMEND NOT TO USE IT UNLESS FILTERED WHEN USED AS A RAW MATERIAL IN FOOD INTENDED FOR FINAL CONSUMERS.